



Presto Stantest Pvt. Ltd.

I-42, DLF Industrial Area Phase-1, Delhi Mathura Road, Faridabad 121003, Haryana, India


P : 9210 903 903, +91 129 4272727, 93111 24302 E : info@prestogroup.com

• Faridabad • Sonapat • Kolkata • Mumbai • Pune • Ahmedabad
• Chennai • Bangalore • Hyderabad

www.prestogroup.com



Ultra Low Deep Freezer



Air Cooled Compressor
CFC free refrigerants


Model No. ULT - 244

Ultra-Low Deep Freezer is a unique test cabinet designed to create temperature inside the chamber to detect the change in the physical characteristics of material and to ascertain the actual working life of testing device.


Available in Prima Series with Touch Screen Models and Various capacities and temperature range.

- Temperature control through PT-100 sensor
- Highly accurate test results under uniform cooling temperatures in the chamber
- High Grade imported Puf insulation
- Maximum Thermal Efficiency by insulation means.
- Bright LED display
- Feather touch controls


Equipped with CFC free refrigerants and air cooled compressors, performs conditioning procedures required in rubber and plastic industries. The Ultra Low deep freezers comes with washable condenser filters and aerodynamically shaped fan for maintaining cooling efficiency.

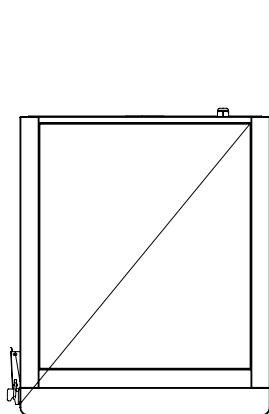

Top View

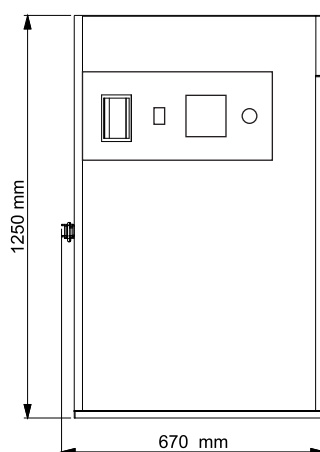

Front View

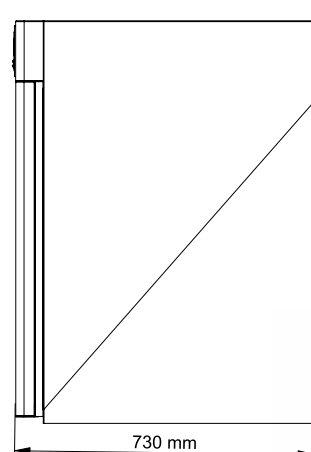

Side View

www.prestogroup.com





Presto Stantest Pvt. Ltd.

I-42, DLF Industrial Area Phase-1, Delhi Mathura Road, Faridabad 121003, Haryana, India

P : 9210 903 903, +91 129 4272727, 93111 24302 E : info@prestogroup.com

• Faridabad • Sonapat • Kolkata • Mumbai • Pune • Ahmedabad
• Chennai • Bangalore • Hyderabad

www.prestogroup.com



Key Specifications:

Capacity	95 litres
Display	LED (Digital) 7 Segment Display
Accuracy	$\pm 2^{\circ}\text{C}$
Least Count/Resolution	0.1 $^{\circ}\text{C}$
Power	15A, 220V, Single phase, 50 Hz
Temperature Range * (As per Requirement)	-10 $^{\circ}\text{C}$ -20 $^{\circ}\text{C}$ -40 $^{\circ}\text{C}$ -60 $^{\circ}\text{C}$

* Lab condition should be maintain 27 deg. ± 2 deg.

Highlights:

No. of Sample racks	2
Lockable Handle	Yes
Material	Mild Steel (Outer Body) Stainless Steel (Inner Body)
Finish	Powder coated Havel Gray & Blue combination finish and bright chrome / zinc plating for corrosion resistant finish
Door Opening	Front Side
Castor Wheel	Yes
Dimensions	Internal : 455 x 455 x 455 mm External : 670 x 730 x 1250 mm

Optional :

- Prima Series with Touch Screen model.
- Timer upto 9999 hrs.
- Other Capacity : 45 Ltr.

Thank you customers for choosing us as your partners in growth !



*All the above logos are the sole property of their respective owners and are used purely for depiction purposes only.

OUR OTHER PRODUCTS :-

					
Hot Air Oven Prima	Humidity Chamber	Cupping Machine	Salt Spray Chamber Korrox - III	Scratch Hardness Tester Motorised	Tensile Testing Machine

www.prestogroup.com

