



Presto Stantest Pvt. Ltd.

I-42, DLF Industrial Area Phase-1, Delhi Mathura Road, Faridabad 121003, Haryana, India

P : 9210 903 903, +91 129 4272727, 93111 24302 E : info@prestogroup.com

• Faridabad • Sonipat • Kolkata • Mumbai • Pune • Ahmedabad
• Chennai • Bangalore • Hyderabad

www.prestogroup.com




Humidity/Conditioning Chamber Deluxe Model



Model no. PCC-800 Dx

Humidity/Conditioning Chamber is a unique test cabinet designed to create temperature and relative humidity inside the chamber to detect the change in the physical characteristics of material and to ascertain the actual working life of testing device. PRESTO humidity chamber is designed as per standards ASTM D1776, ASTM D1776M-15, BS950 Part-1(D65).

- Temperature sensing through PT-100 sensor
- Alarm system with buzz sound at test end process
- Highly accurate test results under uniform temperatures and humidity levels in the chamber
- Digital Control for Humidity and Temperature
- High Grade imported puff insulation
- Maximum Thermal Efficiency by insulation means.
- SSR based heaters
- Digital Preset timer with LED Display
- In built Auto tuning function
- Water Level Indicator
- Equipped with rapid air circulation German imported fan for uniform and homogenous heating , cooling, humidity, de-humidity inside the chamber
- Inbuilt Calibration feature with reference to master PID controller
- Setting to RTD PT-100 sensor through advanced PID controller
- Auto stop feature to stop machine at set time
- Time totalizer to calculate the no. of Hours run by the instrument
- Reservoir water tank auto refilling (Float value arrangement)

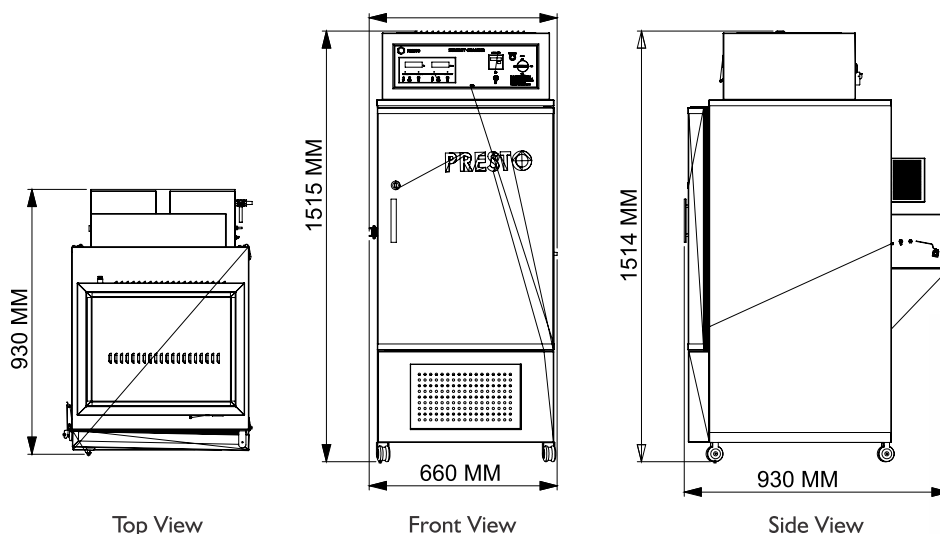

www.prestogroup.com



Presto Stantest Pvt. Ltd.

I-42, DLF Industrial Area Phase-1, Delhi Mathura Road, Faridabad 121003, Haryana, India

P : 9210 903 903, +91 129 4272727, 93111 24302 E : info@prestogroup.com

• Faridabad • Sonipat • Kolkata • Mumbai • Pune • Ahmedabad
• Chennai • Bangalore • Hyderabad

www.prestogroup.com



Equipped with CFC free refrigerants and air cooled compressors, the instrument performs conditioning procedures required in various industries. The Humidity Chamber comes with aerodynamically shaped fans for maintaining heating, cooling, humidification and dehumidification efficiency and provides environmental simulations.

Key Specifications:

Capacity	150 litres
Display	LED (Digital)
Accuracy	Temp. $\pm 2^{\circ}\text{C}$ / Humidity $\pm 5\%$
Least Count/Resolution Temp / Humidity	0.1 $^{\circ}\text{C}$ / 1%
Power	15A, 220V, Single phase, 50 Hz
Temperature Range	15 $^{\circ}\text{C}$ to 60 $^{\circ}\text{C}$
Humidity Range	upto 95%RH
Timer	999 Hr (Changeable to Min. as per request)
Water Level Low	Alarm output

Optional :

- Printing Facility.
- Humidity Chamber Touch Screen with HMI model also available on request.
- Digital cum Computerised Models in Various capacities also Available.

Highlights:

No. of Sample racks	2
Handle	Yes
Wet Heater	1 Kw, 1 no.
Dry Heater	500 Watt, 1 no.
Temperature Sensor	1 (PT-100)
Humidity Sensor	1 (RH)
Movement	Castor Wheels
Material	Stainless Steel (Inner & outer body)
Finish	Stainless Steel combination finish for corrosion resistant.
Dimensions	Inner : 455 x 455 x 710 mm Outer : 660 x 930 x 1515 mm

Thank you customers for choosing us as your partners in growth !



*All the above logos are the sole property of their respective owners and are used purely for depiction purposes only.

OUR OTHER PRODUCTS :-

Hot Air Oven	Humidity Chamber	Cupping Machine	Paint Impact Resistance Tester	Scratch Hardness Tester Motorised	Scratch Hardness Tester Hand Operated

Head Office :

Presto Stantest Private Limited

I-42, DLF Industrial Area Phase-1, Delhi Mathura Road, Faridabad 121003, Haryana, India

P : +91 129 4272727 (100 Lines) E : info@prestogroup.com

• Faridabad • Kolkata • Mumbai • Pune • Ahmedabad • Chennai • Bangalore

www.prestogroup.com

